


First Data®


Model Name: xCL_RP-10

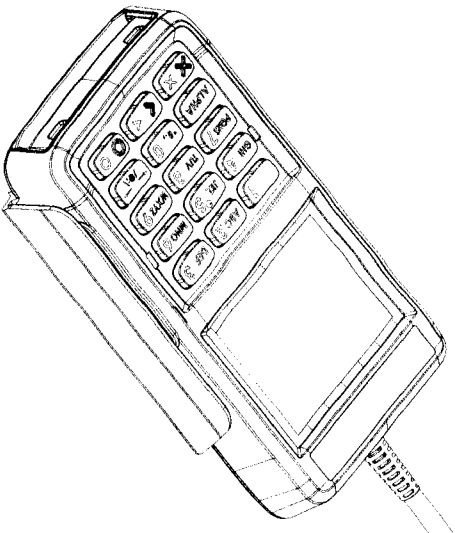

FIRST DATA RP10

INSTALLATION GUIDE

1. PACKAGE CONTENT



■ RP10



■ Privacy Shield (optional)

First Data.

2. DEVICE OVERVIEW

RP10 key factors (Figure 1):

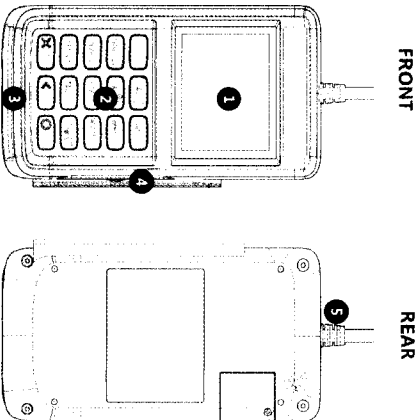


Figure 1

FRONT AREA	
1	2.4" Color Display (320 x 240 pixel)
2	Rubber Keypad
3	Magnetic Stripe Reader (MSR) slot
4	Smart Card Reader (SCR) slot
REAR AREA	
5	USB cable (type A)

3. POWER ON/OFF THE DEVICE

To power on the device, please plug the USB cable type A in terminal or POS.

Note: After booting up RP10, if there is no action on RP10 it enter its idle screen.

4. USING THE MAGNETIC CARD READER

Swipe the card through M slot with magnetic stripe side facing the display. (Figure 2)

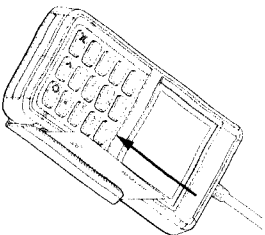


Figure 2

■ RP10 power spec:

- Power Input: 5V DC, 0.5A
- Operating Temperature: 0°C to 40°C

WARNING:

The equipment is intended to be powered by a host device (PC or terminal) that complies with the requirement of the L 60950-1 / EN 60950-1 / UL 60950-1 / CSA 60950-1

First Data.

First Data.

First Data.

CONTACTLESS CARD READER

slot (Figure 3) with the chip side facing upward as in Figure 4.




Figure 4

AD

card, follow the onscreen prompts and press the numeric key
less Cancel (X) key to terminate any current operation or press
firm a value or an option.




Figure 5

CONTACTLESS CARD READER

on top of the contactless logo (Figure 6). The virtual LED will
e transaction.




Figure 6

9. INSTALL PRIVACY SHIELD (OPTIONAL ACCESSORY)

Please refer to Figure 7 for the 2 steps to install the shield:

Step 1: Align and insert two hooks of privacy shield with the slot on RP-10 device (filled by rubber).

Step 2: Push down the bottom side of shield to combine with the device. And the outlook is the same as Figure 8

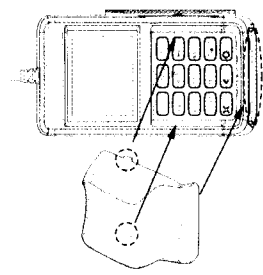


Figure 7




Figure 8

FEDERAL COMMUNICATION COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement:

The product complies with the FCC portable RF exposure limit sets forth for an uncontrolled environment and is safe for intended operation as described in this manual. RF exposure reduction can be achieved if the product is kept as far as possible from the user's body or set the device to lower output power if such function is available.



XAC
XAC Automation Corporation
886-3-577-2738
www.xac.com.tw

The above information is the exclusive intellectual property of XAC Automation Corporation and shall not be disclosed, distributed or reproduced without permission of XAC Automation Corporation.

